NOTE:

THE INFORMATION SHOWN ON THIS SHEET ARE APPROXIMATES, WITH REGARD TO THE EXTENT OF CEILING GRID AND TILE REPLACEMENT, AND INDICATE DESIGN INTENT; GENERAL CONTRACTOR SHALL FIELD VERIFY ALL EXISTING CONDITIONS IN ORDER TO CONFIRM EXTENT OF NEW WORK TO BE PERFORMED BY G.C.

DISCREPANCIES SHALL BE REPORTED TO THE ARCHITECT IN A TIMELY MANNER BEFORE FINAL BIDS ARE SUBMITTED.

NOTE: ELECTRICAL CONTRACTOR

RELOCATED LIGHTS SHALL REMAIN ON EXISTING CURCUITS. ANY ADDITIONAL LIGHTS ADDED TO ROOMS SHALL BE RE-CURCUITED; ELECTRICAL CONTRACTOR TO RE-BALANCE PANEL IF NECCESSARY.

NOTE: CEILING TILE REPLACEMENT

RELOCATED CEILING TILES MAY BE RE-USED, PROVIDED THEY ARE IN EXCELLENT CONDITION. PROVIDE NEW CEILING TILE TO MATCH EXISTING WHERE EXISTING TILE NOT ADEQUATE OR CUTTING AND PATCHING REQUIRED FOR NEW LAY-OUT. (TYPICAL)

NOTE:

EXISTING LIFE SAFETY AND SMOKE DETECTION SYSTEMS TO REMAIN IN PLACE. PERFORM ANY REPAIRS AND/OR REPLACEMENTS NECCESSARY TO MAKE SYSTEMS 100% OPERATIONAL.

ALARM SYSTEM TO REMAIN – TEST FOR PERFORMANCE; REPORT TO ARCHITECT AND/OR OWNER ON THE OPERATIONAL STAUS OF SYSTEM.

CONTRACTOR(S) RESPONSIBLE FOR ANY DAMAGE TO SYSTEM DURING CONSTRUCTION PROCESS.

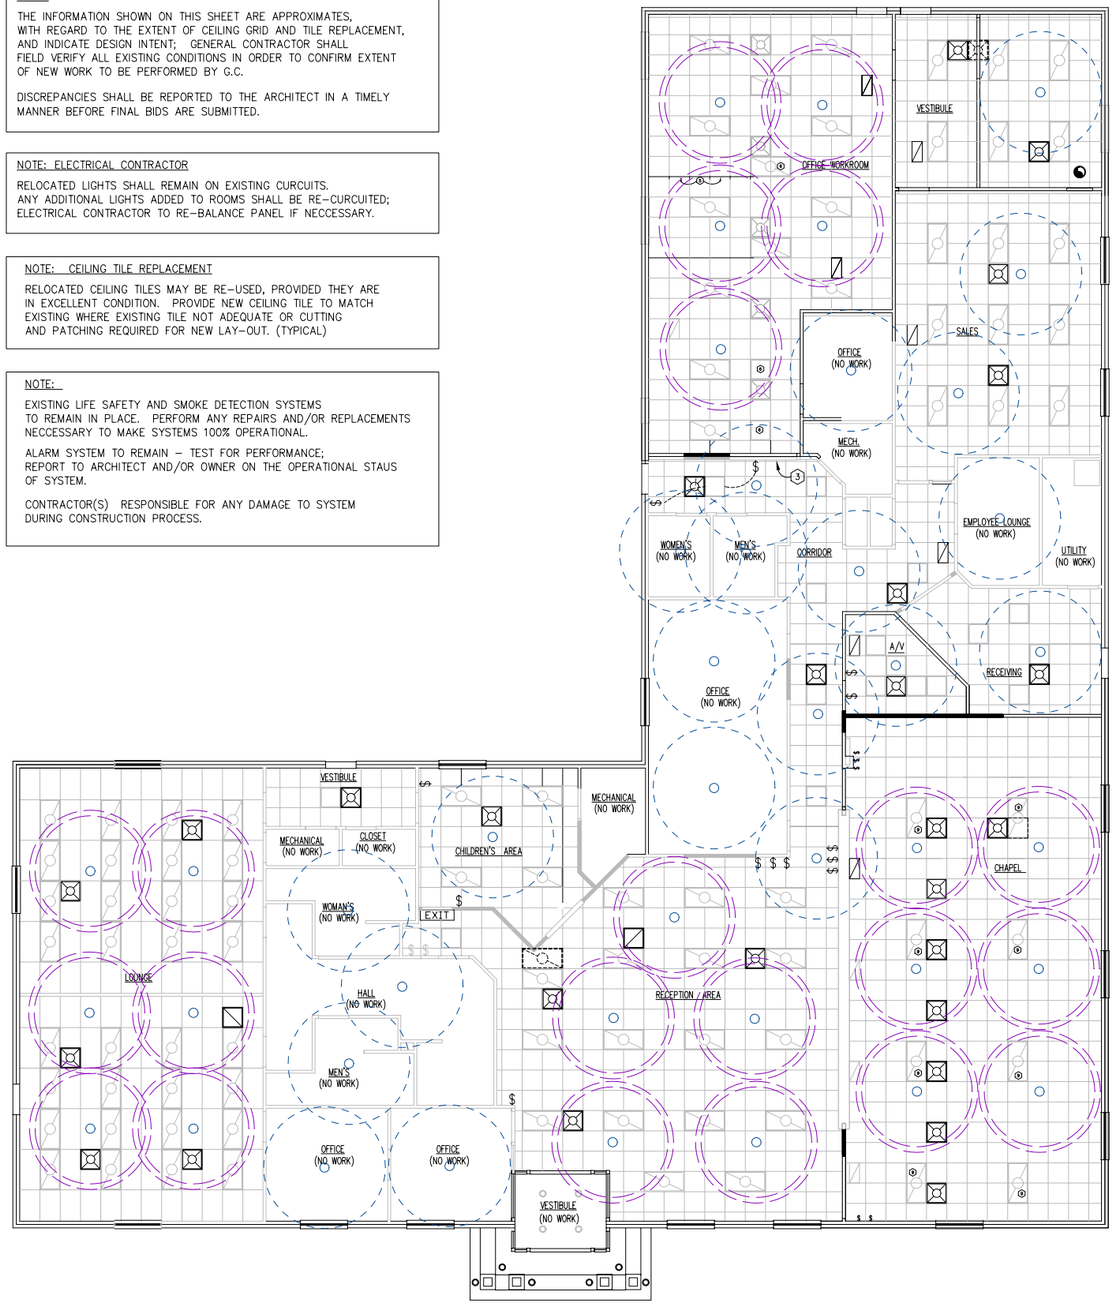



LEGEND

SYMBOL	E EXISTING TO REMAIN	N NEW	D DEMOLITION ITEM	R RELOCATED
$	SWITCH, STANDARD			
$	SWITCH, 3 = 3 WAY, 4 = 4 WAY			
$	SWITCH WITH DIMMER			
Ⓣ	THERMOSTAT			
Ⓒ	CAN LIGHT – 'PRESCOLITE' MODEL # PH4A-STTA4C			
⊢------⊣	DASHED ITEM INDICATES FIXTURE TO BE REMOVED – TYPICAL			

D ALL LIGHTS THAT ARE DEMO. ITEMS ARE TO BE SALVAGED FOR OWNER OR RE-USED IN OTHER ROOMS.

ATLAS FAP42T

ATLAS FAP62T

LONEraven DESIGN
www.loneravendesign.com
2731 hills - miller road
delaware, ohio 43015
phone: 740.369.1476

PROJECT

VINTON INC.

NEWARK, OHIO

NOTES

DRAWN BY: *Craig E. Markley*

DATE: *June 6, 2007*

HISTORY

REV	DATE	BY
REV 1	6-06-07	CEM

REV 1 6-06-07

SHEET 1 OF 1

TITLE

FLOOR PLAN
SPEAKER COVERAGE DETAIL

DRAWING NO.

VOC-300